


LOW VOLTAGE
(2Y)

HIGH VOLTAGE
(1Y)

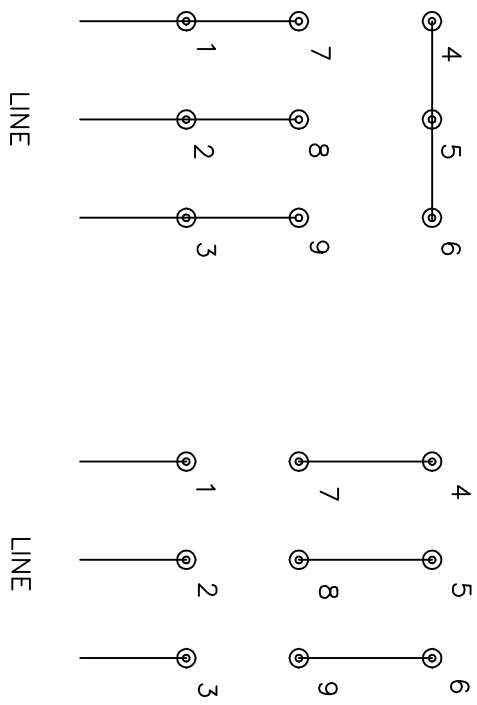

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS		REV. LTR: E		BY: JLP		REVISED: 01/19/99 10:15		TDR: 0171435	
5000QD		FILE: AAA00005140		MTL: -		MDL: -			

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS