

### Enclosures with Safety Interlock for 456 Series

#### Enclosures with Safety Interlock Help You Comply with OSHA Requirements ( Hydra-Lift Drum Rollers Sold Separately )


Enclosures for Morse Hydra-Lift Drum Rotators have a safety interlock to automatically shut off the drum roller when the gate is opened. Open the enclosure gate, secure your upright drum on the base plate, then close the gate to allow operation.

Outside post-to-post Dimensions: L88" W40" H63.25" (224 x 102 x 161 cm)

Install all Morse Drum Rotators in accordance with OSHA requirements for enclosure and safety interlock, etc. Drum roller automatically turns off when enclosure door is opened.



For OSHA compliance, see OSHA subpart O.1910.212(a)(4) "Barrels, containers, and drums. Revolving drums, barrels, and containers shall be guarded by an enclosure which is interlocked with the drive mechanism, so that the barrel, drum, or container cannot revolve unless the guard enclosure is in place."

Power connections and motor controls must comply with applicable codes.

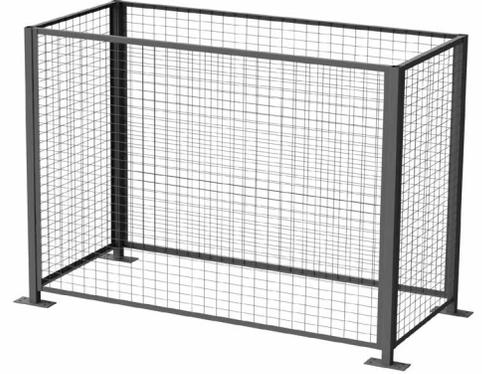

MADE  
IN  
USA

#### Guard Enclosure shown below with Drum Roller and Controls that are Sold Separately

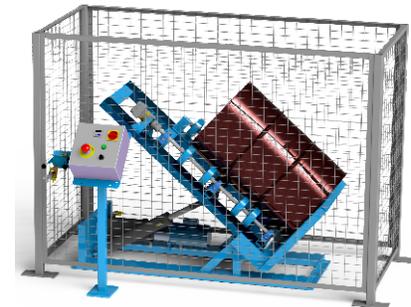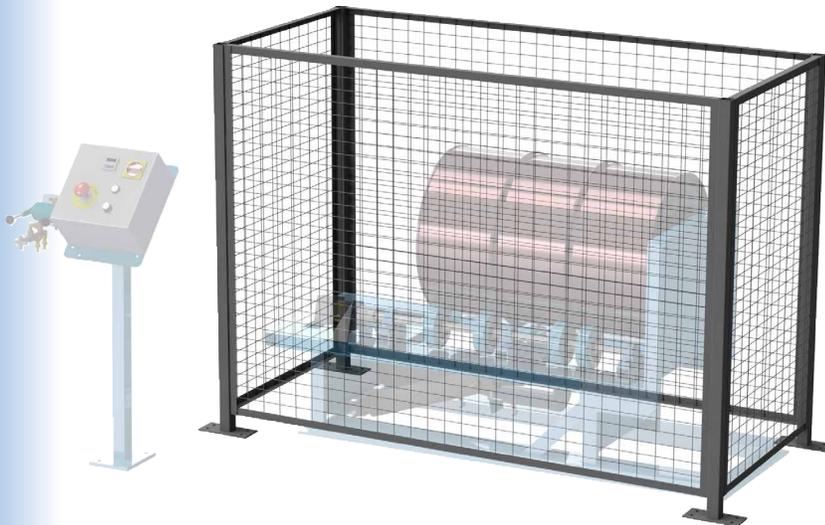

| Guard Enclosure Kit | Enclosure Gate Switch | Fits Drum Roller Model # (sold separately) |
|---------------------|-----------------------|--|
| GEK-456-1           | AC                    | 456-1                                      |
|                     |                       | 456-1-50                                   |
| GEK-456-3           | AC                    | 456-3                                      |
|                     |                       | 456-3-575                                  |
|                     |                       | 456-3-50                                   |
| GEK-456-E1          | AC Explosion proof *  | 456-E1                                     |
|                     |                       | 456-E1-50                                  |
| GEK-456-E3          | AC Explosion proof *  | 456-E3                                     |
|                     |                       | 456-E3-50                                  |
| GEK-456-A           | AIR Switch            | 456-A                                      |

\* Explosion Proof Gate Switch is rated for Class II Division 1 Groups E/F/G and for Class I Division 1 Groups B/C/D




Magnet door closure




**Dimensions**

**Outside Post-to-Post Dimensions of Enclosures**

L88" x W40" x H63.205" (224 x 102 x 161 cm)

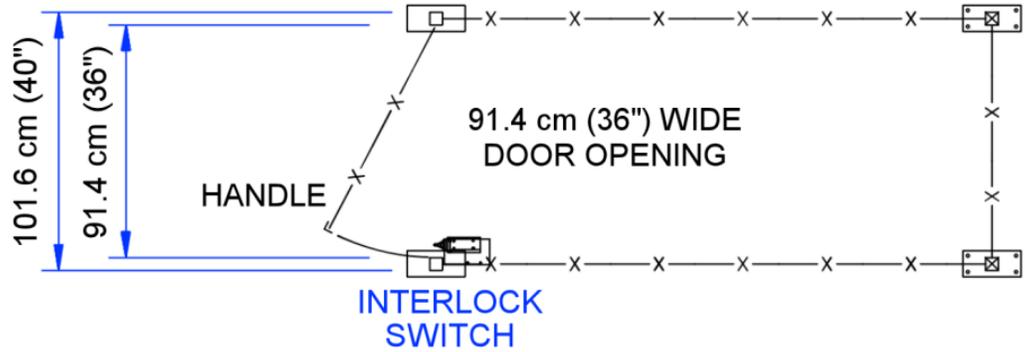

MADE  
IN  
USA

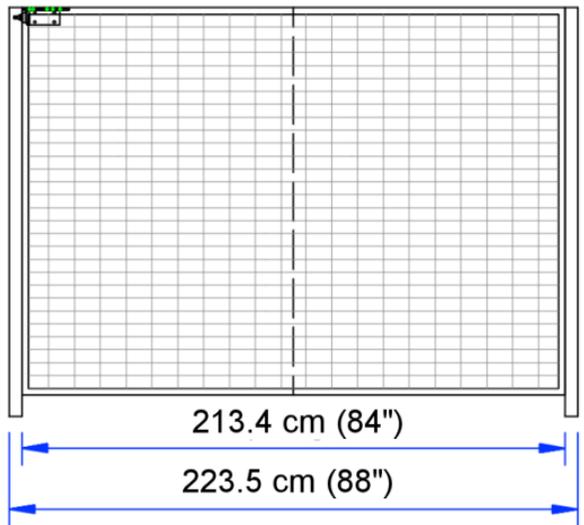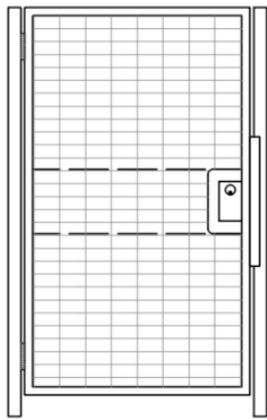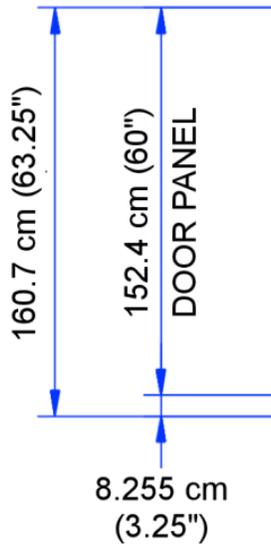

| Parts List |                    |                   |                 |
|------------|--------------------|-------------------|-----------------|
| Qty.       | Width              | Height            | Description     |
| 1          | 3' 0" (91 cm)      | 5' 0" (152 cm)    | Wire Mesh Panel |
| 2          | 7' 0" (213 cm)     | 5' 0" (152 cm)    | Wire Mesh Panel |
| 1          | 2' 10-7/8" (89 cm) | 5' 0" (152 cm)    | Hinge Door      |
| 4          | 2" (61 cm)         | 5' 3.25" (161 cm) | Corner Post     |