MORSE

morsedrum.com

Kit 4560BM-P


Rim Clamp Kit, Spark Resistant

SN 0322 to Current (MMYY) or 400000 to Current

Installation Instructions

- 1. Position Rim Clamp Assembly on **INSIDE** of drum holder bracket (item 1) with holes aligned
- Bolt in place with
 2 bolts (item 2) and 2 washers (item 3) using 9/16" wrench

WARNING - This product can expose you to chemicals including barium sulfate, cobalt, titanium dioxide, and 2-methylimidazole, which are known to the State of California to cause cancer, and bisphenol-A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

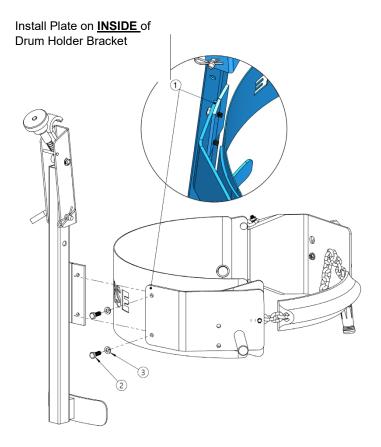




Kit 4560BM-P

Rim Clamp Kit, Spark Resistant

morsedrum.com

SN 0322 to Current (MMYY) or 400000 to Current

DIMENSIONS

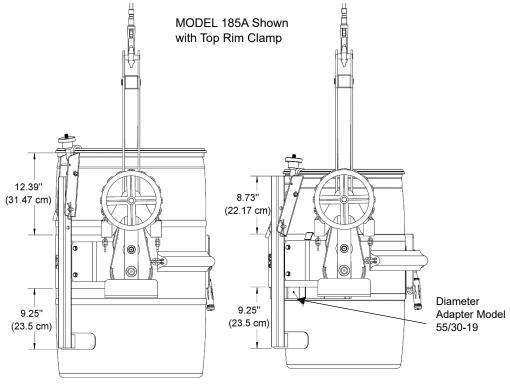

55-Gallon (210L) Plastic Drum

30-Gallon (114L) Plastic Drum

BEFORE OPERATING RIM CLAMP


Set Correct Rim Clamp Position for 55-Gallon OR for 30-Gallon Drum (210 Liter OR 114 Liter Drum)

Insert pin through correct holes to set Top Rim Clamp to position for ONE of the following drum sizes:

55-gallon (210 liter) size drum

30-gallon (114 liter) size drum





MORSE M Kit 4560BM-P Rim Clamp Kit, Spark

morsedrum.com

Rim Clamp Kit, Spark Resistant

SN 0322 to Current (MMYY) or 400000 to Current

OPERATING INSTRUCTIONS

Steps to Secure Drum


STEP 1.

Tighten cinch chain or web strap around drum just enough to hold drum with bottom jaw of Top Rim Clamp positioned under top rim of drum.

Swing bottom jaw into position against drum sidewall to engage directly beneath drum top rim.

STEP 2.

Swing top hook over top rim of drum and turn hand wheel clockwise until SECURELY clamped over drum top rim.

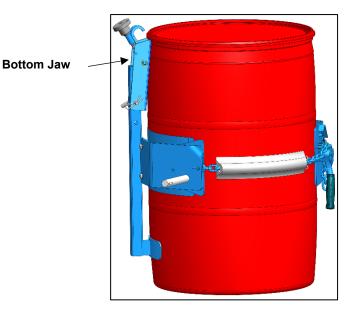

STEP 3.

Securely tighten cinch chain or web strap around drum.

STEP 4.

IMPORTANT - Lift Drum SLIGHTLY... Then ensure:

- 1. Bottom jaw is engaged under drum top rim
- 2. TIGHTEN Top jaw to ensure it grips drum top rim

Steps to Release Drum

- 1. Lower drum to floor in upright position
- 2. Release cinch chain or web strap from around drum
- 3. Open Top Rim Clamp by turning knob counter clockwise
- 4. Disengage hook from drum top rim

