




MORSE 

286 SERIES

SPECIFICATIONS SHEET

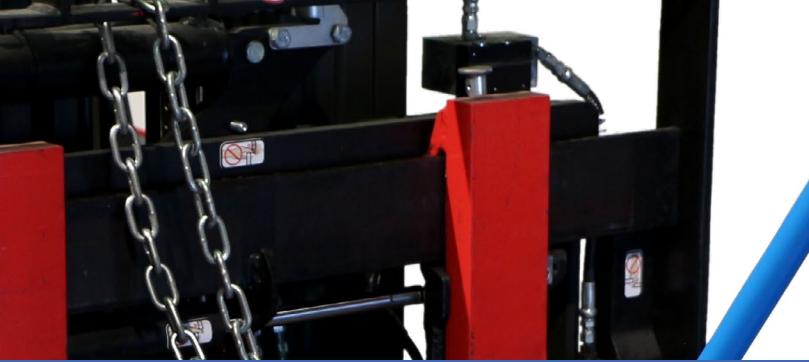

- Steel drum with closed head, or removable top on and secure
- Rimmed plastic drum with non-removable top, or removable top on and secure
- Fiber drum with top on and metal clamp ring closure secured



MORSPEED 1000 FORKLIFT DRUM MOVERS

Move MORE drums with MORSPEED

- Lift, move and place rimmed drum right from your forklift
- Mounts on forks in seconds without tools
- Safety chain secures to forklift carriage
- Raise forks to grip drum. Steel jaws grip upper rim of drum.
- Capacity: 1000 Lb. (454 kg)
- Requires drum of at least 50 Lb. (22.7 kg)
- Adjust head for handling drum down to 18" (45.7 cm) tall

Wide **MORSPEED** jaws securely grasp virtually any RIMMED drum. They are completely mechanical and automatic. Encased mechanism provides precise, reliable, automatic drum gripping. Forklift operator simply drives forward and raises forks.

Works with straight walled drum, or even deformed ribs. Does NOT depend on drum ribs or friction. Does NOT require any modification to your truck.




- Even works with straight walled or damaged drums
- Will work with any diameter drum
- Requires 18" (46 cm) minimum drum height
- Requires drum weight of at least 50 Lb. (23 kg) to actuate jaws



Model #	Description
286-1	Fork mount, Handle 1000 Lb. (454 kg) drum with single head
286M-1	Fork mount with Spark Resistant Parts, Handle 1000 Lb. (454 kg) drum with single head

Dimensions

FORK POCKET OPENING

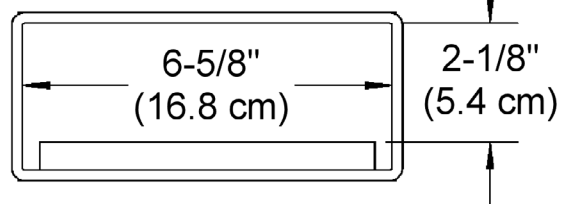

- Each fork pocket opening is 6-5/8" wide x 2-1/8" high (16.8 x 5.4 cm)
- Fork pockets are 26-5/8" deep (67.6 cm)
- Requires 16-3/8" (41.6 cm) inside width between forks

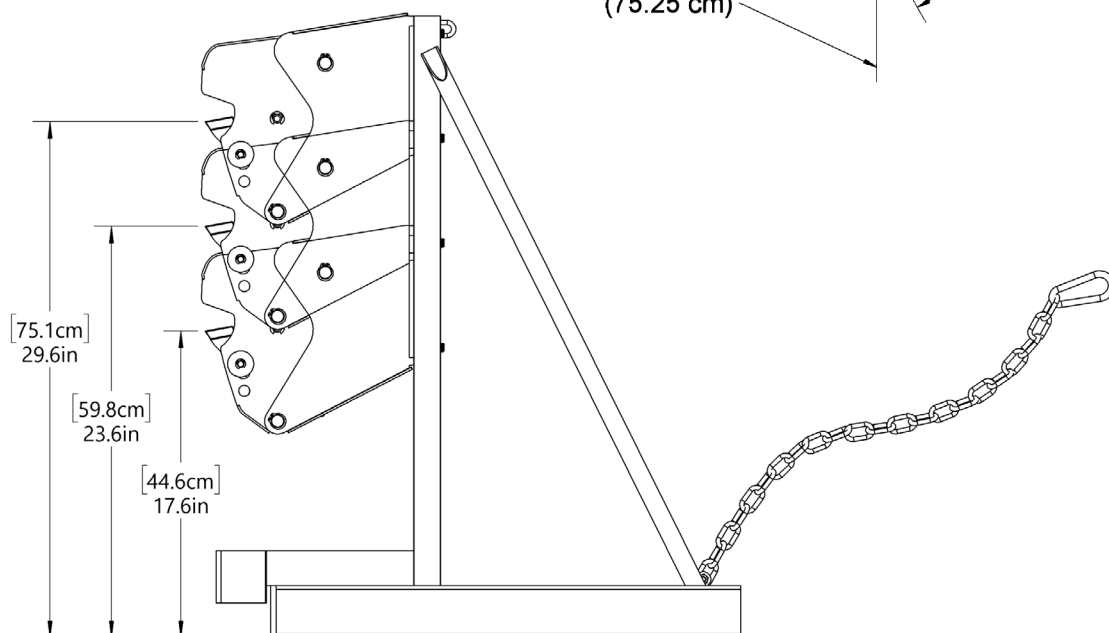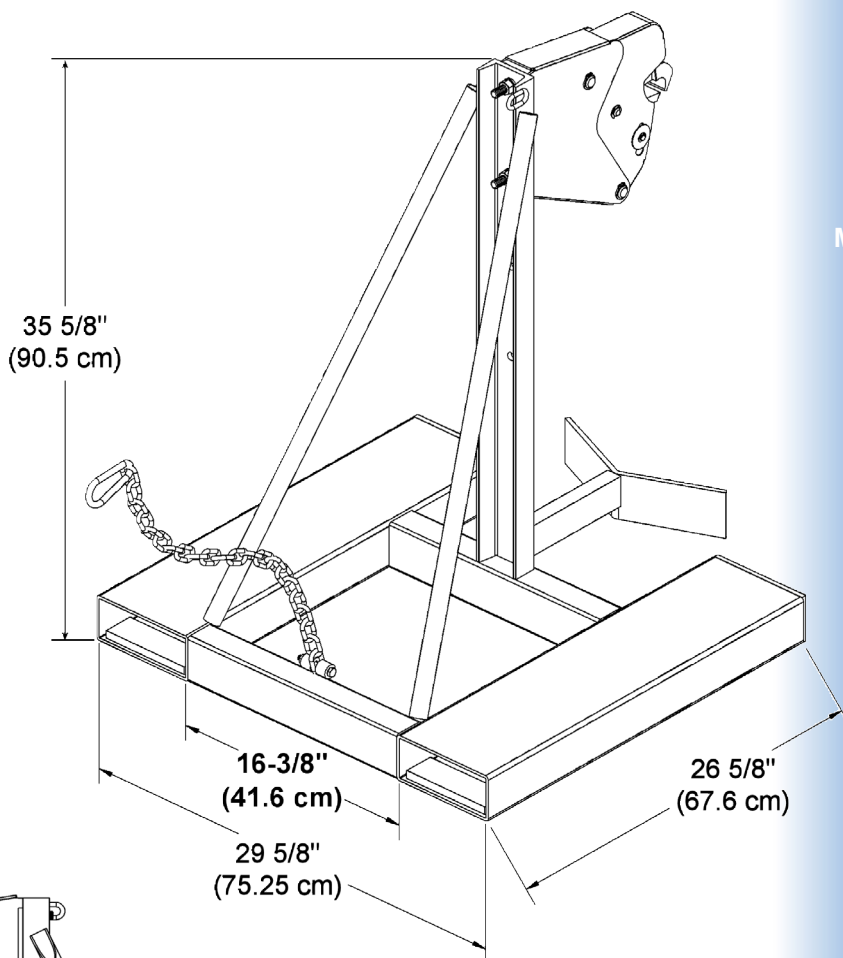

Mount Head with Jaws at 3 different positions in order to handle various height drums

MADE
IN
USA