



GEK-1-5154 SERIES

SPECIFICATIONS SHEET



GUARD ENCLOSURE KITS


Safety Enclosures for Single Drum Rollers

Enclosures for Morse Single Stationary Drum Rollers have a safety interlock to automatically shut off drum roller when gate is opened.

Open enclosure gate, place drum onto drum roller. Then close the gate to allow operation. Connections are included for air powered models only. Customer to provide controls and connections for 1-phase and 3-phase AC models.

Install all Morse Drum Rotators in accordance with OSHA, CSA or CE requirements for enclosure and safety interlock, etc. Drum roller automatically turns off when enclosure door is opened.

For OSHA compliance, see OSHA subpart O.1910.212(a) "Barrels, containers, and drums. Revolving drums, barrels, and containers shall be guarded by an enclosure which is interlocked with the drive mechanism, so that the barrel, drum, or container cannot revolve unless the guard enclosure is in place." Power connections and motor controls must comply with applicable codes.

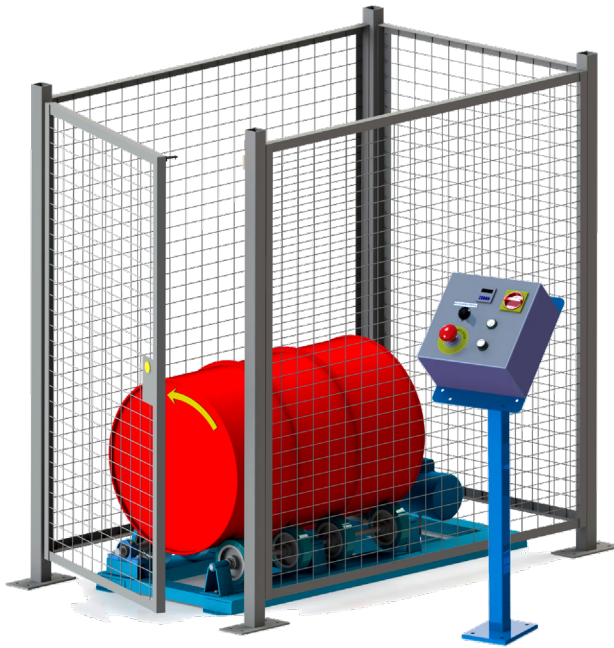

Magnet door closure

Kit #	Description (drum roller sold separately)	Gate Switch
GEK-1-5154-1	Fits Single Stationary Drum Roller with 1-phase electric motor	AC
GEK-1-5154-3	Fits Single Stationary Drum Roller with 3-phase electric motor	AC
GEK-1-5154-E1	Fits Single Stationary Drum Roller with Explosion-proof 1-phase electric motor	AC
GEK-1-5154-E3	Fits Single Stationary Drum Roller with Explosion-proof 3-phase electric motor	AC
GEK-1-5154-A	Fits Single Stationary Drum Roller with Air motor	AIR

* Explosion Proof rated for Class I Group D, and Class II Groups F and G



GEK-1-5154 SERIES

Single Drum Roller Enclosure Kits

SPECIFICATIONS SHEET

DIMENSIONS

