



GEK-309 SERIES

SPECIFICATIONS SHEET

GUARD ENCLOSURE KITS


Safety Enclosures for Drum Tumblers

Enclosures for Morse Drum Tumblers have a safety interlock to automatically shut off drum Tumbler when gate is opened.

Open enclosure gate, place drum onto drum Tumbler. Then close the gate to allow operation. Connections are included for air powered models only. Customer to provide controls and connections for 1-phase and 3-phase AC models.

Install all Morse Drum Rotators in accordance with OSHA, CSA or CE requirements for enclosure and safety interlock, etc. Drum Tumbler automatically turns off when enclosure door is opened.

For OSHA compliance, see OSHA subpart O.1910.212(a)® "Barrels, containers, and drums. Revolving drums, barrels, and containers shall be guarded by an enclosure which is interlocked with the drive mechanism, so that the barrel, drum, or container cannot revolve unless the guard enclosure is in place." Power connections and motor controls must comply with applicable codes.

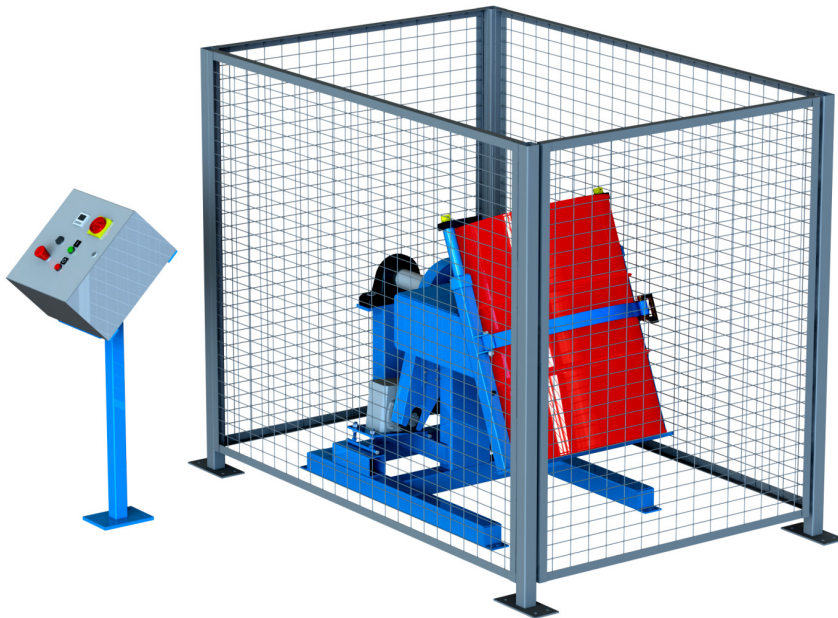

Magnet door closure

Enclosure Kit	Description (drum Tumbler sold separately)	Gate Switch
GEK-309-1	Fits model 309-1 Drum Tumbler with 1-phase electric motor	AC
GEK-309-3	Fits model 309-3 Drum Tumbler with 3-phase electric motor	AC
GEK-309-E1	Fits model 309-E1 Drum Tumbler with Explosion-proof 1-phase electric motor	AC
GEK-309-E3	Fits model 309-E3 Drum Tumbler with Explosion-proof 3-phase electric motor	AC
GEK-309-A	Fits model 309-A Drum Tumbler with Air motor	AIR

* Explosion Proof rated for Class I Group D, and Class II Groups F and G



DIMENSIONS

Enclosure outside post-to-post dimensions:
L76" x W52" x H63.25"
(193 x 132 x 161 cm)

4' (121.9 cm) WIDE HINGE DOOR OPENING

