
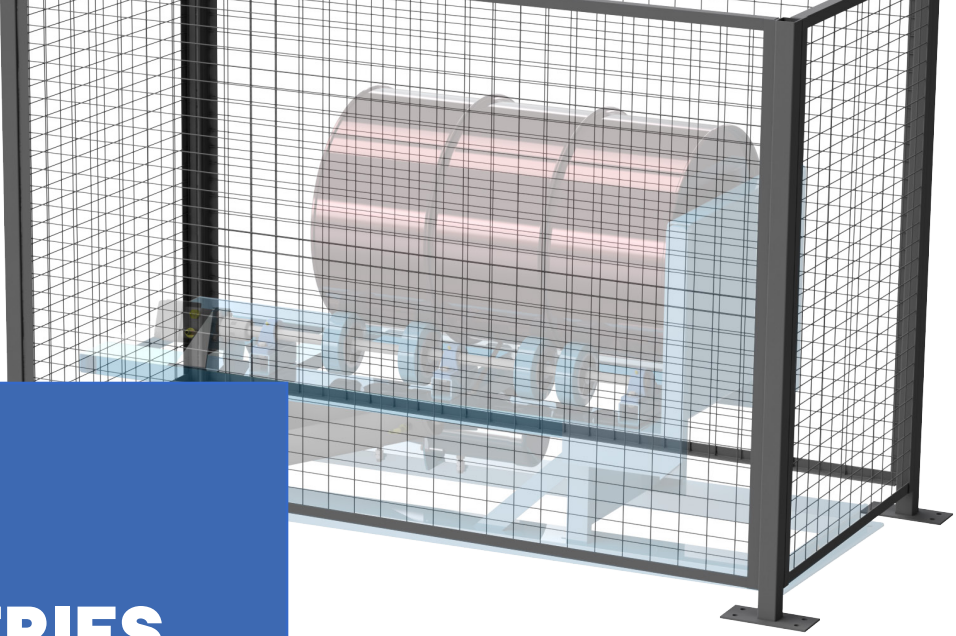






MORSE

GEK-456 SERIES

SPECIFICATIONS SHEET

SAFETY ENCLOSURE KITS for Hydra-Lift Drum Rollers

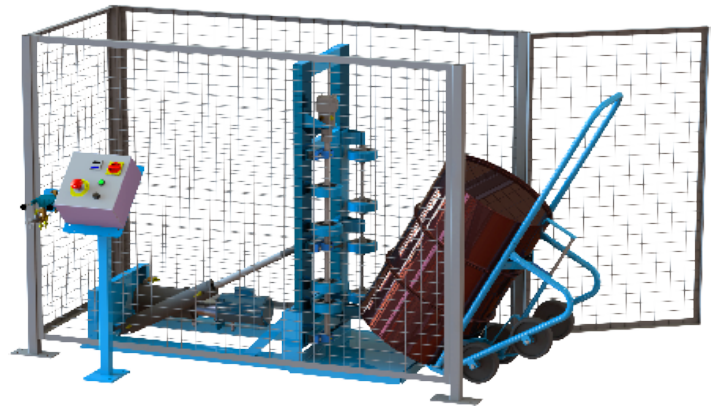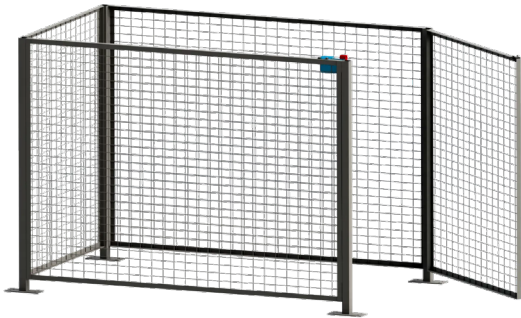


Enclosures for Morse Hydra-Lift Drum Rotators have a safety interlock to automatically shut off the drum roller when the gate is opened. Open the enclosure gate, secure your upright drum on the base plate, then close the gate to allow operation.

Outside post-to-post Dimensions: L88" W52" H63.25" (2235 x 1321 x 1607 mm)

Install all Morse Drum Rotators in accordance with OSHA requirements for enclosure and safety interlock, etc. Drum roller automatically turns off when enclosure door is opened.

For OSHA compliance, see OSHA subpart O.1910.212(a)[4] "Barrels, containers, and drums. Revolving drums, barrels, and containers shall be guarded by an enclosure which is interlocked with the drive mechanism, so that the barrel, drum, or container cannot revolve unless the guard enclosure is in place."

Power connections and motor controls must comply with applicable codes.

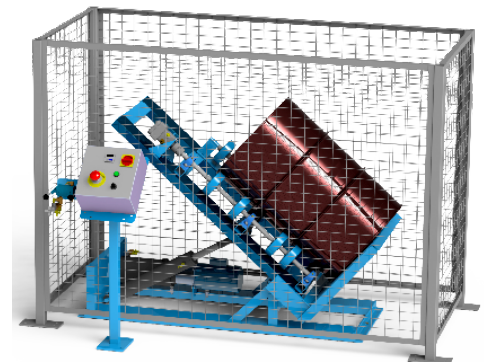

Guard Enclosure Kit	Enclosure Gate Switch	Fits Drum Roller Model
GEK-456-1	AC	456-1
		456-1-50
GEK-456-3	AC	456-3
		456-3-575
		456-3-50
GEK-456-E1	AC Explosion proof *	456-E1
		456-E1-50
GEK-456-E3	AC Explosion proof *	456-E3
		456-E3-50
GEK-456-A	AIR Switch	456-A

* Explosion Proof Gate Switch is rated for Class II Division 1 Groups E/F/G and for Class I Division 1 Groups B/C/D



Magnet door closure



Dimensions

4' (1219 mm) Wide Door Opening

