



morsedrum.com

Kit 4556M-P

Bracket Assembly, Spark Resistant

SN 0209 to Current (MMYY) or 400000 to Curren

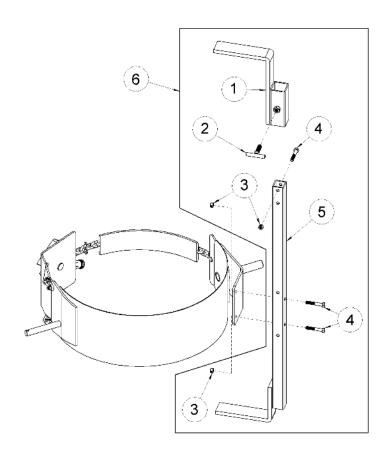

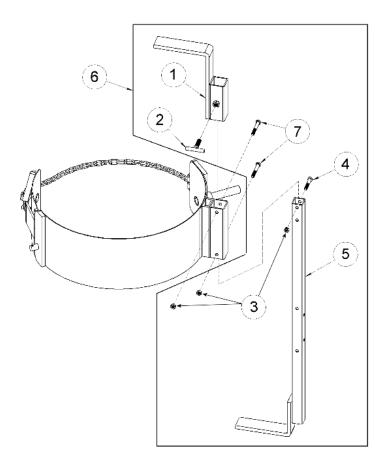

INSTALLATION INSTRUCTIONS for MORCINCH™ Drum Holder

- Bolt bottom bracket (item 5) to drum holder, using 2 bolts (item 4) and 2
 nuts (item 3), bolt in place through the 2 lowest holes on bottom bracket.
- 2. Slide hold down (item 1) down over top of bottom bracket and tighten in place with tee handle (item 2).
- 3. Fasten stop bolt (item 4) and nut (item 3) into top hole of bottom bracket.

INSTALLATION INSTRUCTIONS for Drum Holder with Socket Tube

- 1. Slide bottom bracket (item 5) up through socket tube and, using 2 bolts (item 7) and 2 nuts (item 3), bolt in place through the 2 lowest holes on bottom bracket.
- 2. Slide hold down (item 1) down over top of bottom bracket and tighten in place with tee handle (item 2).
- Fasten stop bolt (item 4) and nut (item 3) into top hole of bottom bracket. Use bottom hole for 195 Series starting with serial number 0207.



Kit 4556M-P

Bracket Assembly, Spark Resistant SN 0209 to Current (MMYY) or 400000 to Curren

morsedrum.com

OPERATING INSTRUCTIONS

TO SECURE DRUM

- Position drum holder assembly so bottom bracket (item 5) rests on floor
- Loosen tee handle (item 2) and slide hold down (item 1) up to highest position. Tighten Tee handle.
- Load drum onto bottom bracket and into drum holder with a hand truck
- Loosen tee handle and slide hold down to meet top of drum.
 Tighten Tee handle. (see Figure 1)
- Secure drum with chain and ratchet mechanism. Drum is now ready to be lifted and tilted.

TO RELEASE DRUM

- 1. Lower drum to floor in upright position.
- Release chain from ratchet mechanism by applying pressure to ratchet handle in a clockwise direction with one hand and opening pawl to free ratchet with other hand. Remove chain link from ratchet.
- Loosen tee handle and slide hold down up to highest position.
 Tighten Tee handle.
- 4. Remove drum with hand truck.




Figure 1
RIMLESS plastic drum
with Kit 4556M-P
Bracket Assembly Kit



WARNING - This product can expose you to chemicals including barium sulfate, cobalt, titanium dioxide, and 2-methylimidazole, which are known to the State of California to cause cancer, and bisphenol-A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov